



AERIAL WORK PLATFORM



AERIAL WORK PLATFORM/ACCESS

Trojan Battery - Rise Above the Rest

With over 80 years of experience, Trojan Battery delivers the world's most dependable, durable and powerful deep cycle batteries for use in aerial work platform (AWP)/access equipment.

Trojan's broad portfolio of flooded/wet, Deep-Cycle Gel™ and AGM batteries are available in 6-volt and 12-volt sizes and yield ideal performance in even the harshest conditions. Our award-winning flooded batteries feature Trojan's proprietary Maxguard® Advanced Design Separator and exclusive Alpha Plus® paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs.

Our Deep-Cycle Gel™ and AGM batteries are maintenance free, require no watering and offer a convenient alternative to flooded batteries.

Trojan's AWP/Access products deliver superior performance and is why:

- Trojan Battery's Plus Series™ was awarded Best Overall winner in Lift and Access magazine's 2007 LLEAP Awards
- The world's top aerial work platform manufacturers and rental companies trust Trojan batteries to deliver power for their equipment

With Trojan Battery, you can expect maximum uptime and more productive hours on the job allowing you to rise above the rest. We offer outstanding technical support provided by full-time applications engineers. *Trojan batteries are available worldwide through Trojan's Master Distributor Network.*


Call 800-423-6569 or 562-236-3000 for more information or visit us at www.trojanbattery.com.

Clean energy for life™

BCI GROUP SIZE	TYPE	CAPACITY ^A Minutes		CAPACITY ^B Amp-Hours (AH)		TERMINAL TYPE (See Below)	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	5 Hr Rate	20 Hr Rate		L	W	H ^D	
6 VOLT DEEP CYCLE BATTERIES										
GC2	T-605	383	105	175	210	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	58 (26)
GC2	T-105	447	115	185	225	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	185	225	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	195	240	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	195	240	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	215	260	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	215	260	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
901	J250G	475	130	195	235	5	11 1/2 (292)	7 (178)	11 7/8 (302)	67 (30)
901	J250P	540	135	215	250	6	11 11/16 (297)	7 (178)	11 1/2 (292)	72 (33)
902	J305G	620	170	255	310	5	12 1/4 (311)	7 (178)	14 3/8 (365)	90 (41)
902	J305P	675	175	270	315	6	11 5/8 (295)	7 (178)	14 3/8 (365)	95 (43)
902	J305H	745	195	285	335	6	11 5/8 (295)	7 (178)	14 3/8 (365)	97 (44)
903	L16G	750	185	305	370	5,9	12 1/4 (311)	7 (178)	17 (432)	106 (48)
903	L16P	805	200	320	390	6,9	11 5/8 (295)	7 (178)	16 3/4 (424)	113 (51)
903	L16H	885	225	345	420	6	11 5/8 (295)	7 (178)	16 3/4 (424)	124 (56)
6 VOLT DUAL PURPOSE AGM BATTERIES										
GC2	6V-AGM	385	-	154	200	6	10 1/4 (260)	7 1/16 (179)	10 5/8 (270)	65 (29)
12 VOLT DUAL PURPOSE AGM BATTERIES										
27	27-AGM	175	-	76	100	6	12 (305)	6 5/8 (168)	9 3/16 (233)	67 (30)
6 VOLT DEEP-CYCLE GEL BATTERIES										
GC2	6V-GEL	394	-	154	189	5	10 1/4 (260)	7 1/8 (181)	10 7/8 (276)	68 (31)
12 VOLT DEEP-CYCLE GEL BATTERIES										
27	27-GEL	179	-	76	91	5	12 3/4 (324)	6 3/4 (171)	9 1/4 (234)	63 (29)
31	31-GEL	200	-	85	102	5	12 15/16 (329)	6 3/4 (171)	9 5/8 (245)	69 (31)

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr rate and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

TERMINAL CONFIGURATIONS

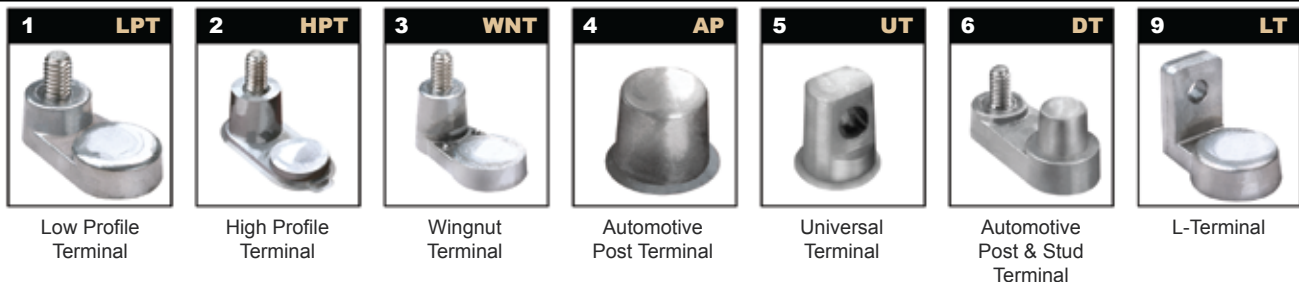

For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at www.trojanbattery.com.