



## **MARINE**

### **Trojan Battery - Power Your Boat with the Best**

With over 80 years of experience, Trojan Battery delivers the world's most trusted batteries for use in marine applications.

Trojan's flooded/wet deep cycle and dual purpose AGM batteries yield ideal performance and power for your boat. Our flooded batteries feature our proprietary Maxguard<sup>®</sup> Advanced Design Separator and exclusive Alpha Plus<sup>®</sup> paste formulation. Together these technologies help extend the life of your battery, sustain performance and lower overall maintenance costs. Our dual purpose AGM batteries offer the convenience of maintenance free with no watering required.

**Trojan's Marine products deliver superior reliability and is why:**

- **Pro anglers and boaters trust Trojan's deep cycle batteries to keep them trolling and fishing long after the other boats have come in**
- **Seasoned power boaters know they can confidently head out to sea with Trojan batteries on-board to provide dependable house power and peace of mind**

Trojan Battery's durability, longevity and proven technology means you can depend on our batteries for consistent performance in any condition—whether you're angling for fish or cruising for pleasure. We offer outstanding technical support provided by full-time applications engineers.


*Trojan batteries are available worldwide through Trojan's Master Distributor Network.*

Call 800-423-6569 or 562-236-3000 for more information  
or visit us at [www.trojanbattery.com](http://www.trojanbattery.com).

BCI GROUP SIZE	TYPE	CAPACITY <sup>A</sup> Minutes		CRANKING PERFORMANCE		CAPACITY <sup>B</sup> Amp-Hours (AH)			TERMINAL TYPE (See Below)	DIMENSIONS <sup>C</sup> Inches (mm)			WEIGHT lbs. (kg)
		@25 Amps	@75 Amps	CCA <sup>D</sup> @0°F	CA <sup>E</sup> @32°F	5 Hr Rate	20 Hr Rate	100 Hr Rate		L	W	H <sup>F</sup>	
<b>6 VOLT DEEP CYCLE BATTERIES</b>													
GC2	T-105	447	115	-	-	185	225	250	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	62 (28)
GC2	T-105 Plus	447	115	-	-	185	225	250	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	62 (28)
GC2	T-125	488	132	-	-	195	240	266	1,3,4,5	10 3/8 (264)	7 1/8 (181)	10 7/8 (276)	66 (30)
GC2	T-125 Plus	488	132	-	-	195	240	266	1,2,4	10 3/8 (264)	7 1/8 (181)	10 11/16 (272)	66 (30)
GC2H	T-145	530	145	-	-	215	260	287	1,3,4,5	10 3/8 (264)	7 1/8 (181)	11 5/8 (295)	72 (33)
GC2H	T-145 Plus	530	145	-	-	215	260	287	1,2,4	10 3/8 (264)	7 1/8 (181)	11 1/2 (292)	72 (33)
902	J305H	745	135	-	-	285	335	370	6	11 5/8 (295)	7 (178)	14 3/8 (365)	97 (44)
903	L16H	885	130	-	-	345	420	466	6	11 5/8 (295)	7 (178)	16 3/4 (424)	124 (56)
<b>12 VOLT DEEP CYCLE BATTERIES</b>													
921	J185H	415	110	-	-	180	215	239	6	15 (381)	7 (178)	14 5/8 (371)	127 (58)
24	SCS150	150	36	530	650	80	100	-	8	11 1/4 (286)	6 3/4 (171)	9 3/4 (248)	50 (23)
27	SCS200	200	52	620	760	95	115	-	8	12 3/4 (324)	6 3/4 (171)	9 3/4 (248)	60 (27)
30H	SCS225	225	57	665	820	105	130	-	8	13 15/16 (355)	6 3/4 (171)	9 7/8 (251)	66 (30)
<b>6 VOLT DUAL PURPOSE AGM BATTERIES</b>													
GC2	6V-AGM	385	-	1100	1400	154	200	221	6	10 1/4 (260)	7 1/16 (179)	10 5/8 (270)	65 (29)
<b>12 VOLT DUAL PURPOSE AGM BATTERIES</b>													
24	24-AGM	130	-	440	620	61	80	88	6	10 13/16 (259)	6 5/8 (168)	8 7/8 (226)	52 (24)
27	27-AGM	175	-	560	780	76	100	111	6	12 (305)	6 5/8 (168)	9 3/16 (233)	67 (30)
31	31-AGM	190	-	720	950	83	110	122	6	13 1/16 (208)	6 7/8 (174)	8 11/16 (221)	74 (34)
4D	4D-AGM	325	-	1110	1420	131	165	182	6	20 7/8 (530)	8 1/4 (209)	9 3/8 (237)	125 (57)
8D	8D-AGM	460	-	1450	1850	179	230	254	6	20 1/2 (521)	10 9/16 (269)	8 7/8 (226)	167 (76)

- A.** The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B.** The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20 Hr and 100 Hr rates and 86°F (30°C) for the 5 Hr rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C.** Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal.
- D.** C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.
- E.** C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F.** Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

## TERMINAL CONFIGURATIONS

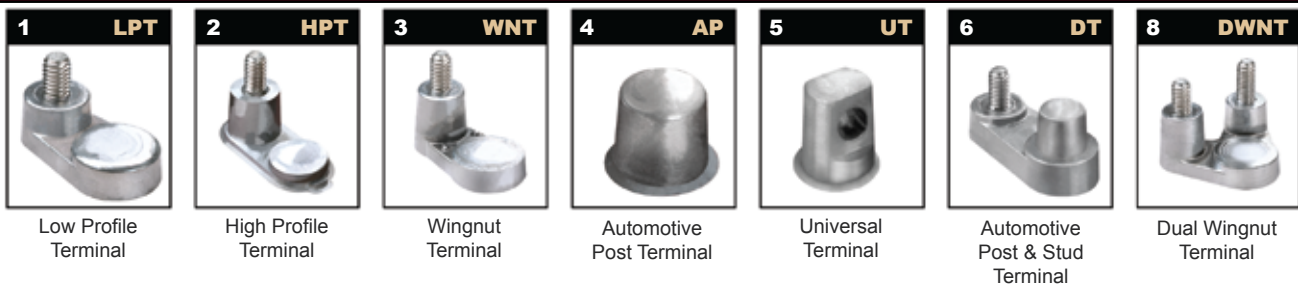

For a Trojan Master Distributor near you, call 800-423-6569 or 562-236-3000 or visit us at [www.trojanbattery.com](http://www.trojanbattery.com).